
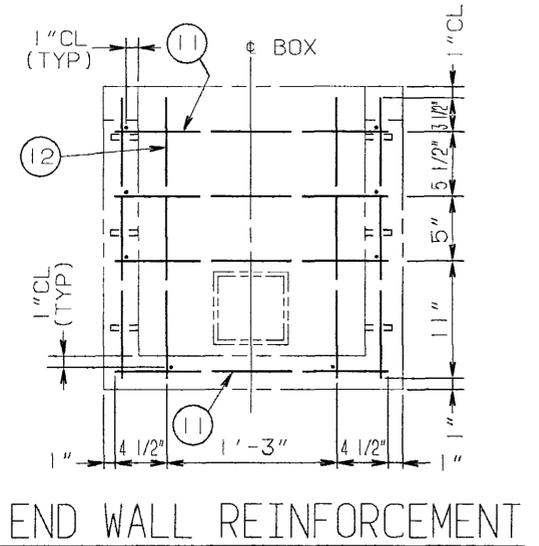
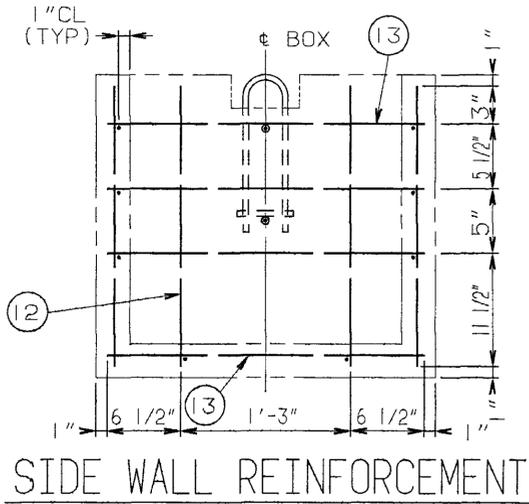


DETAIL "D"

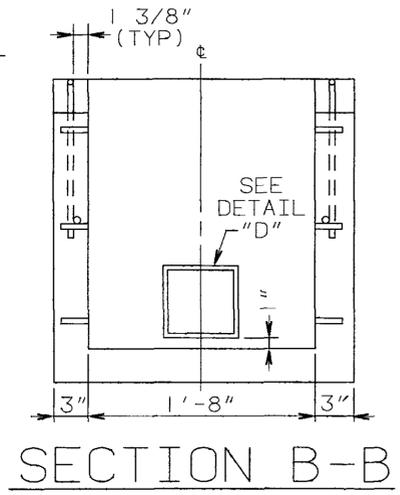

APPROX. WT. OF STEEL = 18 LBS.
 APPROX. WT. OF CONCRETE = 850 LBS.

CONSTRUCTION SPECIFICATION:
 REINFORCING BARS SHALL BE WIRE TIED AT ALL CONTACT POINTS.

INSTALLATION SPECIFICATION:
 IN ROCK EXCAVATION INSTALL BOX ON 3" SAND CUSHION. GROUT LIFTING SLOTS AT TIME OF INSTALLATION.

MATERIAL SPECIFICATIONS:
 ALL REINFORCING BARS SHALL BE BILLET STEEL, DEFORMED, AND SHALL CONFORM TO ASTM SPEC DES A615, GRADE 40.

REFERENCES:
 PROPERTY LINE SPLICE BOX REQUIREMENTS EO-6210

ITEM NO.	LOCATION	SIZE	LENGTH	QUANTITY	SHAPE
13	SIDE WALLS & FLOOR	# 3	2'-4"	8	STRAIGHT
12	END WALLS & SIDE WALLS	# 3	2'-1"	8	STRAIGHT
11	END WALLS & FLOOR	# 3	2'-0"	8	STRAIGHT

REINFORCEMENT SCHEDULE

* "ROAD SAFETY" TYPE PL-24 WITH LOCKING DEVICE (OR APPROVED EQUAL)

ITEM NO.	QUANTITY	DESCRIPTION	DWG. OR SPEC. NO.
6	AS REQD.	CEMENT MORTAR	EO-100,167
5	0.2 CU. YD.	CONCRETE CLASS II	EO-1008
4	2	LIFTING EYE ITEM 8	EO-7841-C
3	2	3/8" INSERT	EO-100,133
2	1	MANHOLE COVER	*
1	1	MANHOLE FRAME	*

BILL OF MATERIAL

PL-24 CUSTOMER PROPERTY LINE BOX PRECAST CONCRETE 2'-0" X 1'-8" X 2'-0"	
CONSOLIDATED EDISON COMPANY OF N.Y. INC. ELECTRICAL ENGINEERING DEPT.	
DATE 5/13/86 LAST REV.	DWG. NO. EO-16736-B REV. 0

CONSTR. STANDARDS
 MANUAL NO. 3
 SECTION 20 BOXES
 DISTRIB. & SERVICE

COMPUTER GENERATED DRAWING NOT TO BE HAND REVISED

NEXT SCHEDULE REVIEW 7-96

FOR APPROVAL	DIV	SIGNATURE	DATE	DRAWN BY	DATE	CHECKED BY	DATE
	D.S.	R. RODRIQUE	8/14/86	SALERNI	5/13/86	A. RUBINOWICZ	8/13/86
				TRACED BY	DATE	SCALE	
						1 1/2" = 1'-0"	
				APPROVED			
				JAMES T. WEBB			8/13/86
				BRIEF DESIGN ENGINEER			DATE
				RICHARD C. SETTEMBRINI			8/14/86
				ELECT. DIST. ENGINEER			DATE